

- Freedman, M.S., Lucas, R.J., Soni, B., von Schantz, M., Munoz, M., David-Gray, Z.K., and Foster, R.G. (1999). Regulation of mammalian circadian behavior by non-rod, non-cone, ocular photoreceptors. *Science* 284, 502–504.
- Lucas, R.J., Douglas, R.H., and Foster, R.G. (2001). Characterization of an ocular photopigment capable of driving pupillary constriction in mice. *Nat. Neurosci.* 4, 621–626.
- Berson, D.M., Dunn, F.A., and Takao, M. (2002). Phototransduction by retinal ganglion cells that set the circadian clock. *Science* 295, 1070–1073.
- Sekaran, S., Foster, R.G., Lucas, R.J., and Hankins, M.W. (2003). Calcium imaging reveals a network of intrinsically light-sensitive inner-retinal neurons. *Curr. Biol.* 13, 1290–1298.
- Hattar, S., Lucas, R.J., Mrosovsky, N., Thompson, S., Douglas, R.H., Hankins, M.W., Lem, J., Biel, M., Hofmann, F., Foster, R.G., *et al.* (2003). Melanopsin and rod-cone photoreceptive systems account for all major accessory visual functions in mice. *Nature* 424, 75–81.
- Dacey, D.M., Liao, H.W., Peterson, B.B., Robinson, F.R., Smith, V.C., Pokorny, J., Yau, K.W., and Gamlin, P.D. (2005). Melanopsin-expressing ganglion cells in primate retina signal colour and irradiance and project to the LGN. *Nature* 433, 749–754.
- Hankins, M.W., and Lucas, R.J. (2002). The primary visual pathway in humans is regulated according to long-term light exposure through the action of a non-classical photopigment. *Curr. Biol.* 12, 191–198.
- Provencio, I., Rodriguez, I.R., Jiang, G., Hayes, W.P., Moreira, E.F., and Rollag, M.D. (2000). A novel human opsin in the inner retina. *J. Neurosci.* 20, 600–605.
- Melyan, Z., Tarttelin, E.E., Bellingham, J., Lucas, R.J., and Hankins, M.W. (2005). Addition of human melanopsin renders mammalian cells photoresponsive. *Nature* 433, 741–745.
- Qiu, X., Kumbalasingi, T., Carlson, S.M., Wong, K.Y., Krishna, V., Provencio, I., and Berson, D.M. (2005). Induction of photosensitivity by heterologous expression of melanopsin. *Nature* 433, 745–749.
- Panda, S., Provencio, I., Tu, D.C., Pires, S.S., Rollag, M.D., Castrucci, A.M., Pletcher, M.T., Sato, T.K., Wiltshire, T., Andahazy, M., *et al.* (2003). Melanopsin is required for non-image-forming photic responses in blind mice. *Science* 301, 525–527.
- Sekaran, S., Lall, G.L., Lucas, R.J., Foster, R.G., and Hankins, M.W. (2007). 2-Aminoethoxydiphenylborane is an acute and potent inhibitor of intrinsically photosensitive retinal ganglion cell activity. *J. Neurosci.* 27, 3981–3986.
- Peirson, S.N., Oster, H., Jones, S.L., Leitges, M., Hankins, M.W., and Foster, R.G. (2007). Microarray analysis and functional genomics identifies novel components of melanopsin signalling. *Curr. Biol.* 17, 1363–1372.
- Sekaran, S., Lupi, D., Jones, S.L., Sheely, C.J., Hattar, S., Yau, K.W., Lucas, R.J., Foster, R.G., and Hankins, M.W. (2005). Melanopsin-dependent photoreception provides earliest light detection in the Mammalian retina. *Curr. Biol.* 15, 1099–1107.

Department of Ophthalmology,
Wellcome Trust Centre for Human
Genetics, University of Oxford,
Roosevelt Drive, Oxford OX3 7BN, UK.
E-mail: russell.foster@eye.ox.ac.uk;
mark.hankins@eye.ox.ac.uk

Correspondences

Rapid extraction of mean emotion and gender from sets of faces

Jason Haberman^{1,2}
and David Whitney^{1,2}

We frequently encounter crowds of faces. Here we report that, when presented with a group of faces, observers quickly and automatically extract information about the mean emotion in the group. This occurs even when observers cannot report anything about the individual identities that comprise the group. The results reveal an efficient and powerful mechanism that allows the visual system to extract summary statistics from a broad range of visual stimuli, including faces.

The apparent effortlessness with which we see our world belies the extraordinary complexity of visual perception. The brain must reduce billions of bits of information on the retina to just a few manageable percepts. To this end, the visual system relies, not simply on filtering irrelevant information, but also on combining statistically related visual information. Texture perception, for example, occurs when the visual system groups a set of somewhat similar items to create a single percept; although the identities of many individual features may be lost, what is gained is a computationally efficient and elegant representation. This sort of statistical summary or ensemble coding has been found for low-level features such as orientated lines, gratings, and dots [1–3], and it makes intuitive sense. If we were not able to extract summary statistics from arrays of dots [1] or gratings [3], texture perception itself would be difficult or impossible.

Because statistical extraction may serve to promote texture

perception [4], it may operate only at the level of surface perception or mid-level vision [5]. We show here that this is not the case. We found that subjects were able to extract and precisely report the mean emotion in briefly presented groups of faces, despite being unable to identify any of the individual faces. The following three experiments suggest that, as was seen for low-level features, observers summarize sets of complex objects statistically while losing the representation of the individual items comprising that set.

Three individuals (one woman, mean age 26.33 years) affiliated with the University of California, Davis participated in three experiments. Informed consent was obtained for all volunteers, who were compensated for their time and had normal or corrected-to-normal vision.

A series of ‘morphed’ faces were created from two emotionally extreme faces of the same person [6]. The morphs were 50 linear interpolations spanning happy to sad, with the happiest face labeled number 1 in the sequence and the saddest face labeled number 50 (Figure 1). Face 1 and face 2 were nominally separated by one emotional unit. In follow-up control experiments, faces were morphed from neutral to disgusted, or from male to female (see Figure S1 in the Supplemental data available on-line with this issue).

In all experiments, each trial consisted of two intervals: the first interval contained a set of faces displayed for 2000 ms in a grid pattern, and the second interval contained one or two test faces displayed until a response was received (0 interstimulus interval; Figure 1A,C,E). In experiment 1, observers judged whether a single test face was happier or sadder than the preceding set of four identical faces (Figure 1A). For each observer, we derived a 75% discrimination threshold, defined by the number of emotional units separating the set and test (Figure 1B).

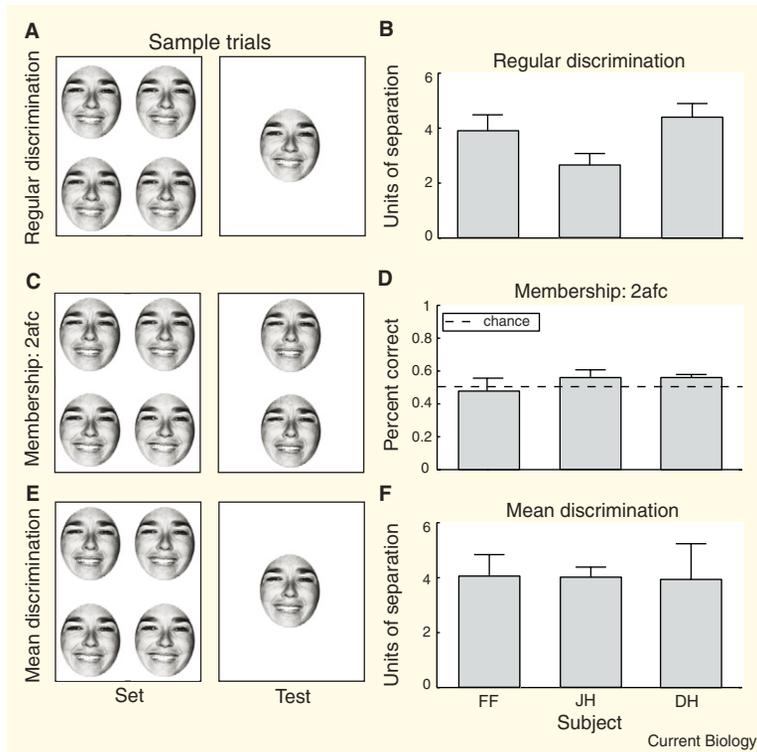


Figure 1. Sample trials and results for the three experiments.

(A,B) To discriminate whether a test face was happier or sadder than a previously viewed set of homogeneous faces with 75% accuracy, the test face had to be 3–4 units happier or sadder than the set (experiment 1). The test face in (A) is 6 units happier than the set. (C,D) Observers were at chance when indicating which of two test faces was a member of the preceding heterogeneous set (experiment 2), suggesting that they had not retained any information about the set's individual identities. The target in (C) is the top face. (E,F) Observers indicated whether the test face was happier or sadder than the *mean emotion* of the preceding set (experiment 3). Despite lacking a representation of the individual set members (D), observers had a remarkably precise representation of the mean emotion of that set. Their 75% correct discrimination of the mean emotion of the set was almost as precise as their ability to discriminate two faces that displayed different emotions (compare B and F). The test face in (E) is 4 units sadder than the mean emotion of the set. Error bars in (B and F) indicate 95% confidence intervals based on 5000 Monte Carlo simulations [11], and error bars in (D) are ± 1 SEM.

In experiments 2 and 3, every face set contained four emotions separated from one another in increments of six emotional units (a suprathreshold separation; Figure 1C,E). The faces were centered on the mean emotion of the set. In each trial, the mean emotion was randomly selected from among our gallery of morphed faces (the emotional mean could range from extremely happy to extremely sad). The emotionality of each face comprising the set was randomly assigned a position within the grid.

In experiment 2, we tested the extent to which observers represented the individual

constituents of a set of emotionally varying faces using a two-alternative-forced-choice (2-AFC) paradigm (Figure 1C). Observers had to indicate which of two simultaneously presented test faces was a member of the preceding set of four faces. The target face was randomly selected from the set of four faces previously displayed. The distracter face was three emotional units happier or sadder than the target face. Observers also performed a control experiment in which the separation between the two test faces was increased to either 15 or 17 emotional units (Figure S2).

Observers performed 480 trials over three runs.

In experiment 3, we tested whether observers had precise information about the mean emotion of a set of faces, even though the mean emotion was never presented in the set. Set size was either 4 or 16 faces, although only four distinct emotions were present on any given trial. Therefore, there were four incarnations of each of the four emotions in set size 16. Observers had to indicate whether a single test face was happier or sadder than the mean emotion of the preceding set. Test faces were 1, 2, 4, or 5 faces happier or sadder than the mean emotion of the set (Figure 1E). Observers performed 832 trials over four runs. In follow-up control experiments, observers performed a similar discrimination task on other emotions (neutral to disgusted) and on another face dimension (gender; Figure S1).

When asked to identify which of two test faces appeared in the preceding set (experiment 2), observers performed at chance levels (Figure 1D; 53% correct, averaged across the three subjects). Even when the separation between test faces was increased to 15 emotional units, observers were still unable to select the set member at above chance performance (Figure S2). They either lost or were unable to code information about individual face emotion. Despite this, Figure 1F demonstrates that they possessed a remarkably precise representation of the mean emotion of the set (experiment 3). In fact, for two of three subjects, discrimination of the mean emotion was as good as discrimination of the relative emotionality of two faces (measured by the number of units of emotional separation required for 75% correct performance; compare Figures 1B and 1F). Mean discrimination threshold was approximately equal between set sizes 4 and 16, indicating that mean emotion was extracted even for large sets of faces. Importantly, we found

that mean extraction generalizes to other emotions (Figure S1A) and even other face dimensions, such as gender (Figure S1B). In these cases, mean discrimination performance was at least as good as regular discrimination. Further precise mean discrimination occurred for stimulus durations as brief as 500 ms (Figure S3).

It is unlikely that the mean extraction revealed here was driven by feature-based processing. Noise added to the faces to reduce low-level cues, such as brightness differences and facial marks, did not impair mean discrimination (Figure S1B). Moreover, when presented with sets of scrambled faces, stimuli thought to require a feature-based strategy [7], observers' ability to discriminate the mean emotion significantly declined.

Our findings — the statistical extraction of mean emotion or gender — contrast with the prototype effect, in which individuals form an idealized representation of a face based on the frequent occurrence of various features over an extended time period, even though that ideal, or prototype, was never viewed [8,9]. Whereas the prototype and other statistical learning effects [10] take several minutes of exposure and cannot be quickly modified in sequential trials, mean extraction occurs rapidly and flexibly on a trial-by-trial basis and takes less than 500 ms — two sequential trials can have very different means, yet observers code each mean precisely. Naïve observers were even able to extract a mean from a novel set of faces that had never been seen before (Figure S4), providing further evidence against a prototype effect. More importantly, unlike the prototype effect, the rapid extraction of mean emotion may reflect an adaptive mechanism for coalescing information into computationally efficient chunks.

We have demonstrated that observers precisely and automatically extract the mean emotion or gender

from a set of faces while lacking a representation of its constituents. This sort of statistical representation could serve two primary functions. First, a single mean can succinctly and efficiently represent copious amounts of information. Second, statistical representation may facilitate visual search, as detecting deviants becomes easier when summary statistics are available [4]. Our results suggest that the adaptive nature of ensemble coding or summary statistics is not restricted to the level of surface perception but extends to face recognition as well.

Supplemental data

Supplemental data are available at <http://www.current-biology.com/cgi/content/full/17/17/R751/DC1>

References

1. Ariely, D. (2001). Seeing sets: Representation by statistical properties. *Psychol. Sci.* 12, 157–162.
2. Chong, S.C., and Treisman, A. (2003). Representation of statistical properties. *Vision Res.* 43, 393–404.
3. Parkes, L., Lund, J., Angelucci, A., Solomon, J.A., and Morgan, M. (2001). Compulsory averaging of crowded orientation signals in human vision. *Nat. Neurosci.* 4, 739–744.
4. Cavanagh, P. (2001). Seeing the forest but not the trees. *Nat. Neurosci.* 4, 673–674.
5. Nakayama, K., He, Z.J., and Shimojo, S. (1995). Visual surface representation: A critical link between lower-level and higher-level vision. In *An Invitation to Cognitive Science, Volume 2, 2 Edition*, S.M. Kosslyn and D.N. Osherson, eds. (Cambridge, MA: MIT Press), pp. 1–70.
6. Ekman, P., and Friesen, W.V. (1976). *Pictures of Facial Affect* (Palo Alto, CA: Consulting Psychologists Press).
7. Farah, M.J., Wilson, K.D., Drain, M., and Tanaka, J.N. (1998). What is “special” about face perception? *Psychol. Rev.* 105, 482–498.
8. Solso, R.L., and McCarthy, J.E. (1981). Prototype formation of faces - a case of pseudo-memory. *Brit. J. Psychol.* 72, 499–503.
9. Posner, M.I., and Keele, S.W. (1968). On genesis of abstract ideas. *J. Exp. Psychol.* 77, 353–363.
10. Fiser, J., and Aslin, R.N. (2001). Unsupervised statistical learning of higher-order spatial structures from visual scenes. *Psychol. Sci.* 12, 499–504.
11. Wichmann, F.A., and Hill, N.J. (2001). The psychometric function: I. Fitting, sampling, and goodness of fit. *Percept. Psychophys.* 63, 1293–1313.

¹The Center for Mind and Brain, and

²The Department of Psychology, The University of California, Davis, California 95618, USA.
E-mail: jmhaberman@ucdavis.edu

Multiple queens means fewer mates

Daniel J.C. Kronauer
and Jacobus J. Boomsma

Obligate multiple mating by social insect queens has evolved in some derived clades where higher genetic diversity is likely to enhance colony fitness [1–3]. The rare and derived nature of this behaviour is probably related to copulations being costly for queens, but fitness trade-offs between immediate survival and future reproductive success are difficult to measure and not well understood [1]. A corollary of this logic, that multiple mating should be less common or lost when genetic diversity among workers is achieved through multiple queens per colony, was suggested more than ten years ago [4]. However, large scale comparative analyses did not support this prediction, quite possibly because they did not contain any informative contrasts [1,2]. Only comparisons between closely related species with similar ecology and high queen-mating frequencies as ancestral state would provide decisive information, but such species pairs are exceedingly rare so that no case studies have been conducted and a comparative statistical approach [5] is impossible. Here we document for the first time that there is a clear link between the number of queens and the average number of matings of these queens, using the army ant *Neivamyrmex carolinensis* as a model system.

While all other studied Old World and New World army ants have very high queen-mating frequencies and a single queen per colony [3,6], up to 13 queens have been found in *N. carolinensis* colonies [6]. However, the species is entirely subterranean and so elusive that it has hardly been studied. It occurs in the southern and

Supplemental Data:

Rapid extraction of mean emotion and gender from sets of faces

Jason Haberman and David Whitney

Supplemental Figures

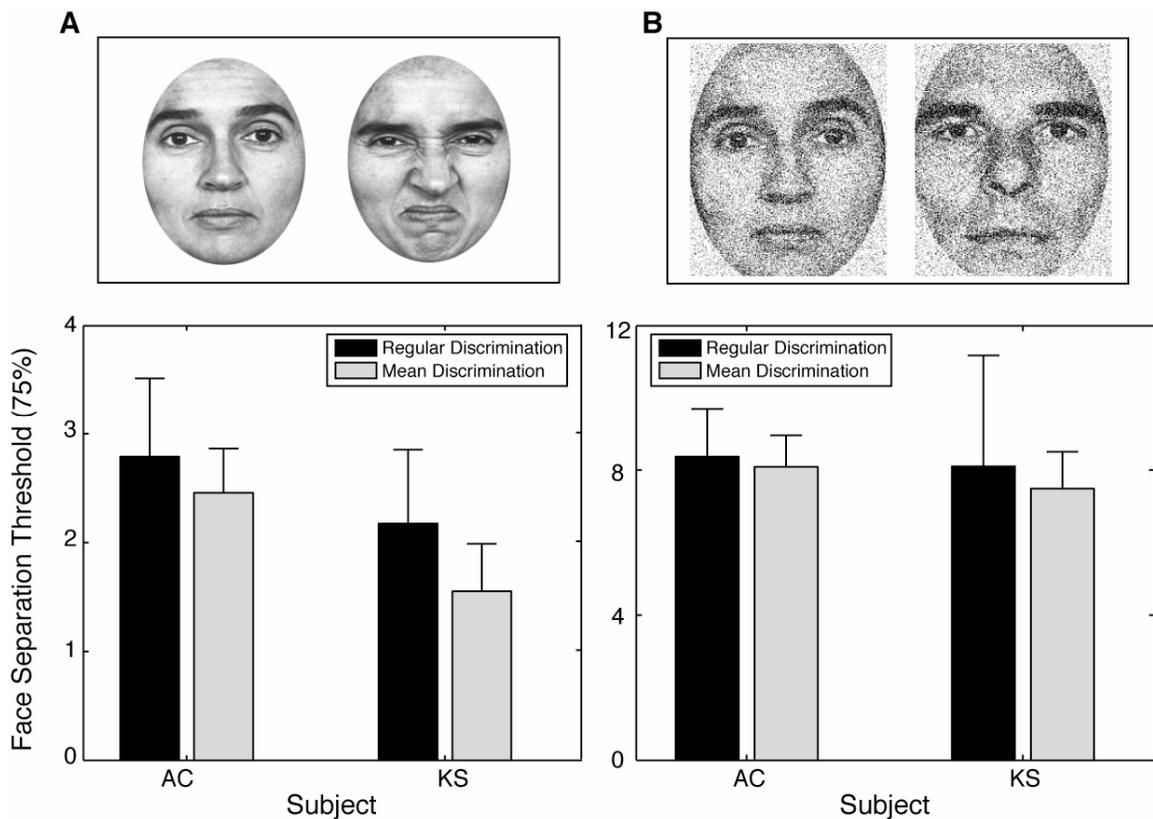


Figure S1. Stimuli and results for two follow-up experiments. We tested how well mean extraction would generalize to other face dimensions. For both neutral to disgusted morphs (A) and female to male morphs (B), participants were able to extract a mean

representation as precisely as they could discriminate any two faces, within the same dimension. In the gender experiment, 30% Gaussian noise was added to reduce the influence of low-level feature cues, such as contrast differences. Similarly precise mean discrimination was obtained with and without the added noise. The results in both experiments here parallel the finding for happy to sad morphs and suggests that statistical representation extends to other emotions and even other face dimensions.

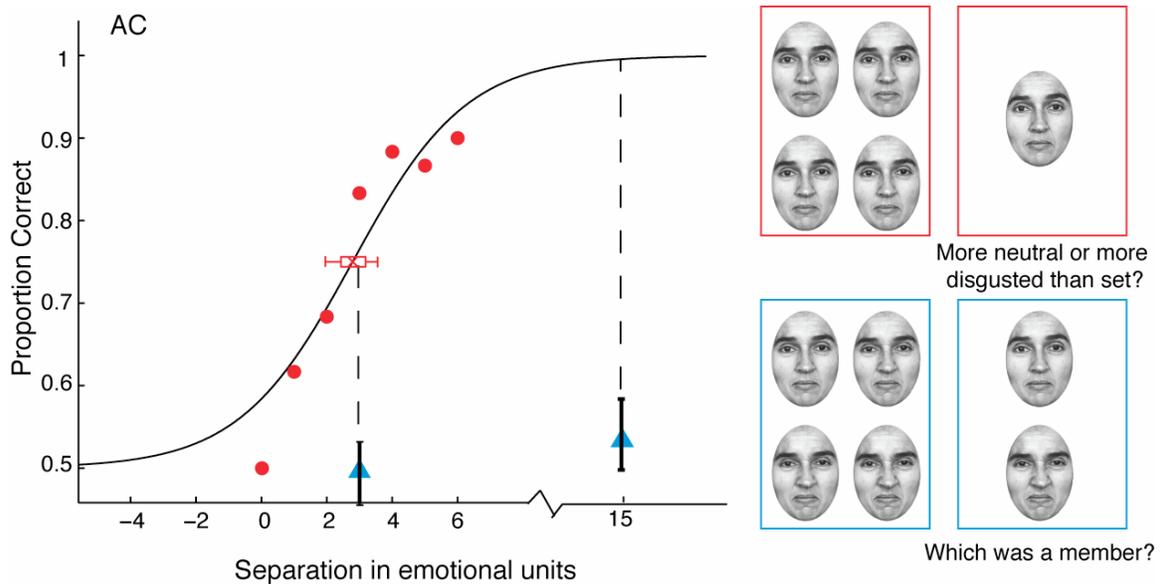


Figure S2. Neutral to disgusted discrimination data for two observers. The solid red circles indicate observers' ability to discriminate which of two faces was more neutral (example stimuli outlined in red; see Figure 1A for task details). To achieve 75% correct performance, subject AC required a separation of 2.2 emotional units. The triangles indicate performance on two conditions of the 2-AFC membership task (example stimuli outlined in blue; see Figure 1C for task details). In one condition, test faces were separated by three emotional units. In the other condition, test faces were separated by at

least 15 emotional units (right test panel, outlined in blue). In both conditions, the test faces were easily discriminable, as indicated by the vertical dashed lines. The same pattern of results was found for other subjects and other stimuli, including happy to sad morphs (Figure 1D). That is, discrimination of test faces separated by three units (Figure 1D) was significantly better than 2-AFC membership identification of the same faces. Observers were at chance in all versions of the 2-AFC experiment, indicating that they did not have a representation of the individual set constituents. This was true despite having a precise representation of the mean emotion of the set (Figure 1E and S1A).

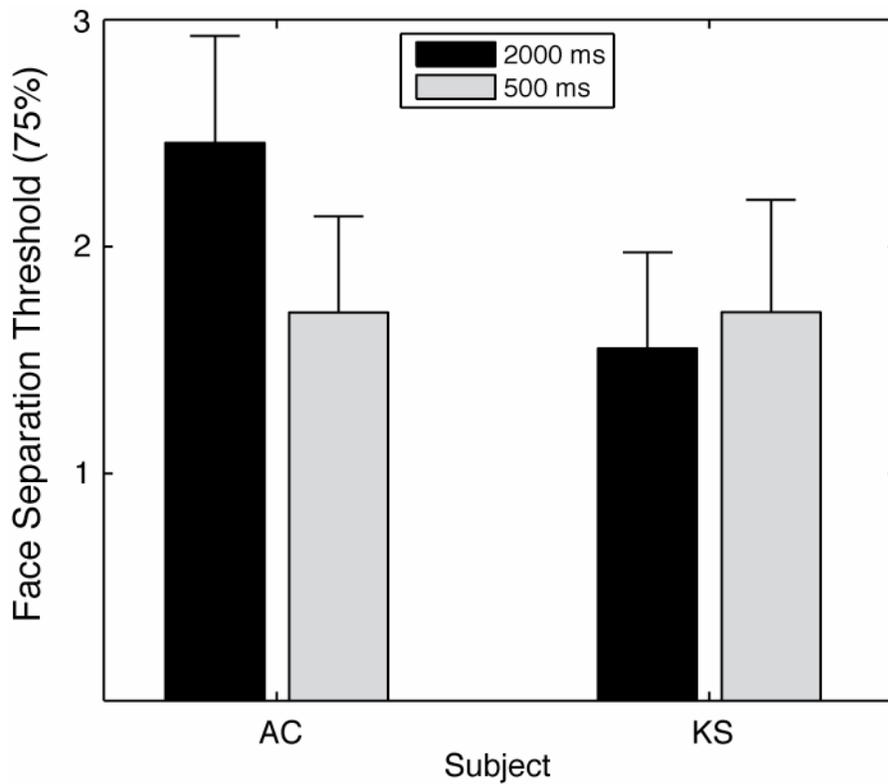


Figure S3. Mean discrimination performance for neutral to disgusted faces as a function of stimulus duration. Observers viewing a set containing up to 16 faces for only 500 ms

were able to extract a precise representation of the mean emotion. Performance at 500 ms did not differ significantly relative to performance at 2000 ms ($P > 0.05$, based on 5000 Monte Carlo simulations [11]). Error bars indicate 95% confidence intervals.

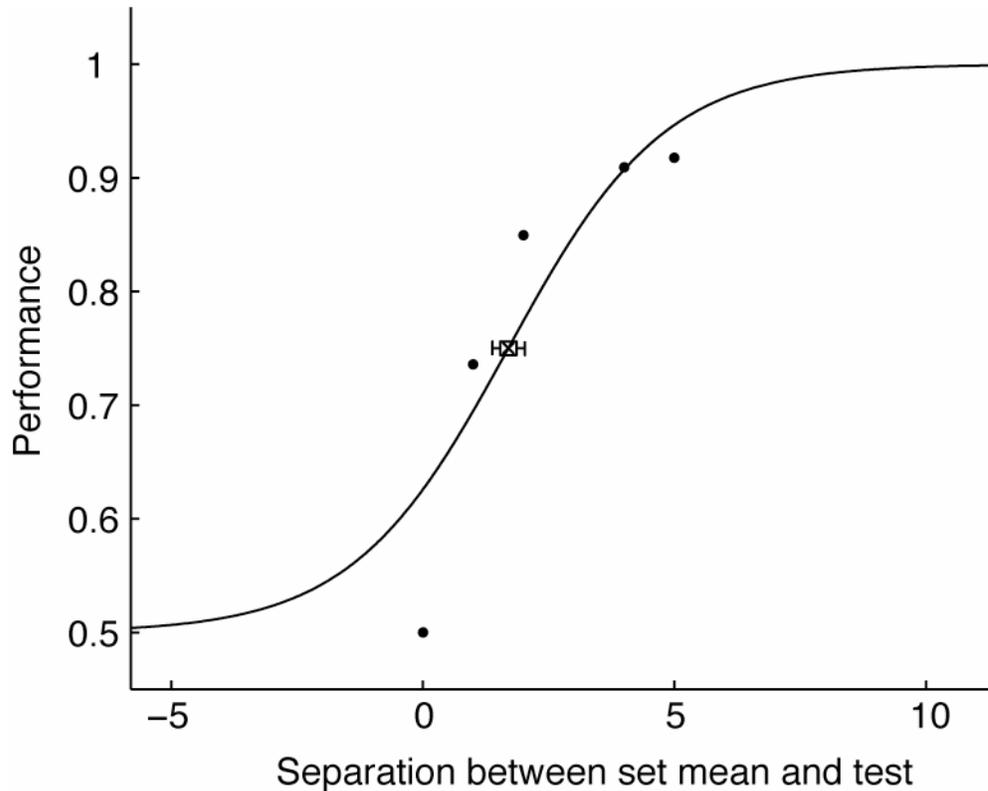


Figure S4. Performance collapsed across 11 naïve observers on mean discrimination. As in experiment 3, observers were asked whether the test face was happier or sadder than the mean emotion of the preceding set. Observers saw each possible set mean only once (a total of 32 trials per observer). The mean of each set was novel on every trial (no repeated means), and the faces were novel to each observer. Despite this limited exposure, observers were able to extract a precise representation of the mean emotion of each set, suggesting that this is not a statistical learning or prototype effect. We modeled

what the mean discrimination data would look like if observers had formed a prototype of the entire range of morphs, and found that, regardless of how well the prototype was coded, mean discrimination performance would have been significantly poorer than found here.